
# **SDB SR900** Wireless Bluetooth transmitter





T: 0031-(0)85 732 68 59 | E: info@silentdiscobox.com
Office: De Hanze 14 6049HZ Herten (Netherlands) Warehouse:
De Hanze 14 6049HZ Herten (Netherlands)
www.silentdiscobox.com

## **SDB SR900** Wireless Bluetooth transmitter

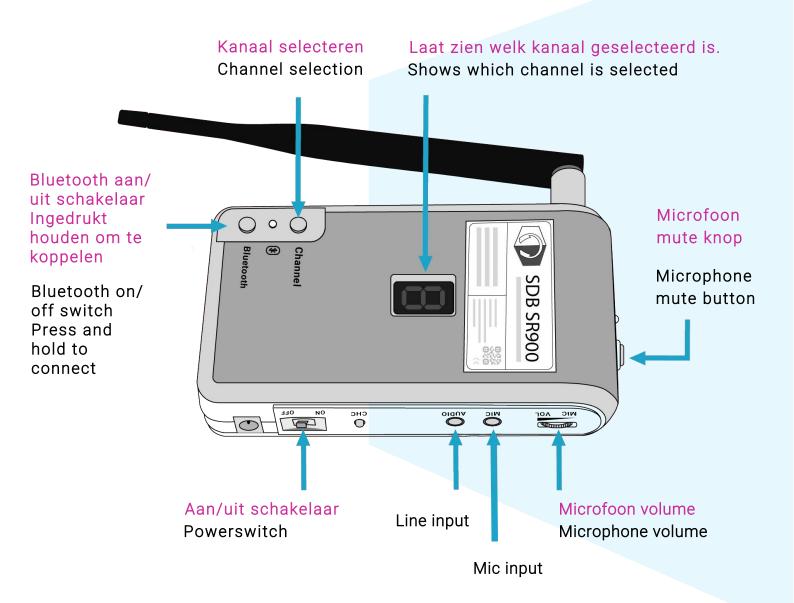



T: 0031-(0)85 732 68 59 | E: info@silentdiscobox.com

Office: De Hanze 14 6049HZ Herten (Netherlands) Warehouse:
De Hanze 14 6049HZ Herten (Netherlands)

www.silentdiscobox.com

### SDB SR900 Wireless Bluetooth transmitter

The SILENT DISCO BOX SR900 is specially designed for the SILENT DISCO BOX HD7-BELT, HD8-BLACK and HD9-RGB headphones. The transmitter has a build-in rechargeable battery and can be used up to 10 hours between charges. There is a line and a mic input so music and microphone can be used directly without an audio mixer. The Bluetooth connectivity is easy to use. The light weight and belt bucket make it easy to take anywhere you want. The basic design and straightforward controls are easy to use.

#### **Quick Start**

- 1. Turn the transmitter on. The display will turn on and shows a channel. Make sure this channel matches the channel on the headphones.
- 2. Plug in the audio input and play music from your device. The Silent Disco set is now working.

### Microphone

- 1. Plug in the microphone
- 2. Press the mute button to turn on the mic.
- 3. Change the volume with the level slider.

#### Bluetooth

- 1. Choose whether you want to play music via Bluetooth or a minijack cable. If you have both connected Bluetooth will always be prior.
- 2. When choosing for Bluetooth, press and hold the Bluetooth button for about 3 seconds to turn on the Bluetooth. When the indicator light blinks blue there is no connection. When it stays blue there is a connection.
- 3. To turn of the Bluetooth press and hold the Bluetooth button for about 3 seconds. The indicator light turns red and goes off.
- 4. To pair a Bluetooth device press and hold the Bluetooth button for about 5 seconds. The indicator light flashes blue and red.

#### **Specifications**

Wireless Stereo transmitter UHF/RF system FM modulation. Operating distance up to 50 meters

Frequencies; 863.100Mhz, 863.800Mhz, 864.900Mhz. Frequency response 30-15000 Hz

Power supplied DC 12V 150mA. Signal to noise ratio >75dB.

Channel separation >50dB. Distortion <1%



**T:** 0031-(0)85 732 68 59 | **E:** info@silentdiscobox.com

Office: De Hanze 14 6049HZ Herten (Netherlands) Warehouse:

De Hanze 14 6049HZ Herten (Netherlands)

www.silentdiscobox.com